

3M23 OZONE / OXYGEN SYSTEM

The advanced chassis based design of the 3M23 Ozone Generator is the foundation for a powerful ozone production system. It combines the power of patented Floating Plate Technology™ with high concentration ozone reactor cells and high output, amplitude modulated, high frequency power supplies. The fully redundant and self-contained configuration is housed in a stainless steel enclosure. The M Series are the most powerful high output air-cooled ozone generators in the world, with standard designs from 7 lbs./day to more than 50 lbs./day ozone.

Modular redundancy is the key to the M Series revolutionary chassis based design, providing operators with unsurpassed reliability. The 3M23 is engineered to meet the most demanding ozone process requirements with a standard manual and 0-10VDC or 4-20mA proportional ozone control interface. The external control signal interface control, or panel-mounted manual control, provides smooth variable ozone concentration control from 0-100. The intuitive control panel design includes feed gas control, reactor backpressure gauges, power supply feed back reference meter and LED ozone production indicator as well as analog and fault indicator output signals.

Inside the 3M23, the highly efficient and reliable ceramic and titanium reactor cells are powered by an advanced, high frequency, pulse modulated variable control power supply. Responsive and accurate ozone output control is assured by instantaneous amplitude modulation and the proven stability of patented Floating Plate Technology™ reactor cell design—exclusive to Pacific Ozone Technology.

The M Series Ozone Generators from Pacific Ozone Technology are easy to install and easy to operate, making ozone generation and control simple and efficient, to provide years of trouble free operation.



THE 3M23

FEATURES

- Stainless Steel Floor Mount Enclosure
- Air-Cooled Ceramic and Titanium Reactor Cell
- Feed Gas Regulator
- Over Temperature Control
- Stainless Steel Gas Control Manifold
- Redundant modular ozone chassis design

CONTROLS

- Variable Output Control 0-100%
- Power Feed Back Reference Meter 0-10VDC
- Reactor Pressure Gauge 0-15 psi
- Feed Gas Flow Control 0-200scfh
- LED Visual Ozone and Fault Indicators
- On/Off Lighted Circuit Breaker
- Analog Power Supply Output 0-10VDC or 4-20mA external control



3M23 OZONE / OXYGEN SYSTEM

Product Description: Ozone Generation System

Part Number R-MSG0332 230V model

Specifications:

Ozone Production 90scfh Oxygen	135 g/hr - 7.1 lbs./day
Ozone Production 90scfh Dry Air	60 g/hr - 3.2 lbs/day
Ozone Concentration	3% - 9% %/wt
Ozone Concentration Dry Air	1% - 2% %/wt
Maximum Reactor Pressure	15 psi
Feed Gas Flow Range	0-150 scfh
Variable Control	0-100%
External Control	0-10VDC or 4-20mA
External Output Signal	0-10VDC
Power Consumption	1320 watts
Power Supply Fuse	8 ampere
On/Off Breaker	40 ampere
Air Cooling	720 scfm
Compressed Air Inlet Fitting	1/2 " fnpt
Ozone Outlet Fitting	1/2 " tube
Power Requirement	230V 50/60Hz 1 phase
Height	52.5 inches
Width	23.0 inches
Depth	25.5 inches
Weight	335 lbs.

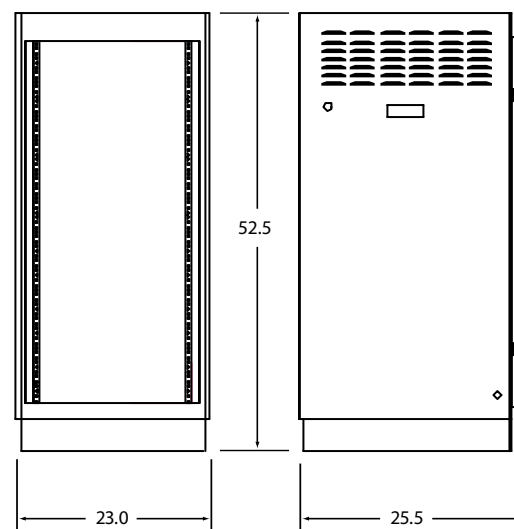

THE 3M23

OPTIONS
 Oxygen Concentrator
 Air Dryer
 PID Controller
 Dissolved Ozone Monitor
 Ozone Gas Detector

Optional oxygen concentrator packages and air dryer systems are available to meet the feed gas requirements of the M Series Ozone Generators. See important M Series dry air and oxygen quality requirements.



EQUIPOS ESPECIALIZADOS DEL ATLANTICO SA de CV

PASEO LOMAS DE ROSALES #307 COL. LOMAS DE ROSALES C.P. 89100 TAMPICO, TAM. MÉXICO

TEL. - (833) 116-54-10

www.eatlantico.com

e-mail: marte.alvarez@atlantico.com